



Customer approval :

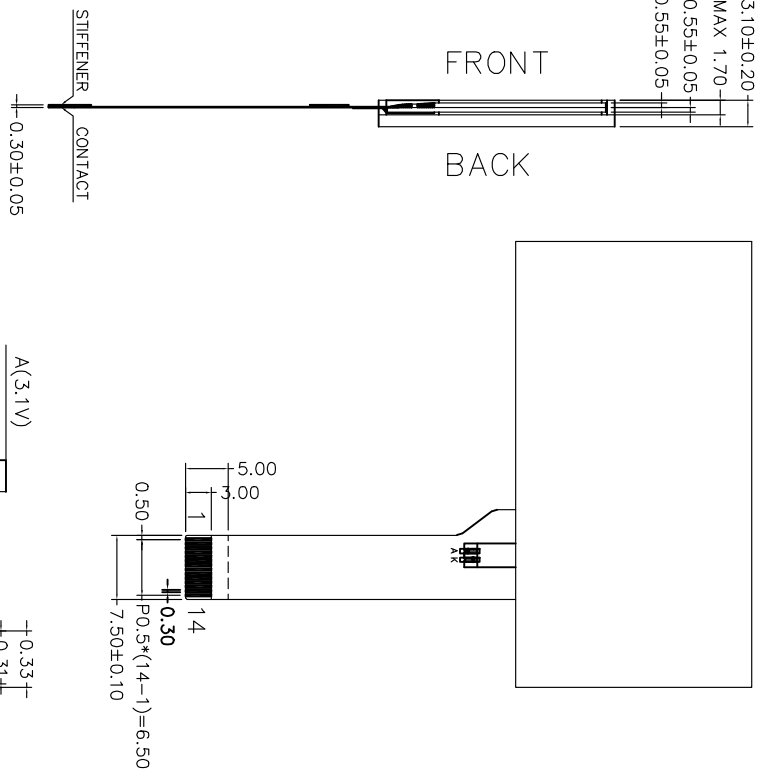

1. Display Mode: FSTN/Transflective/Positive.
2. Viewing Angle: 12 0'clock.
3. Drive Method: 1/33 Duty, 1/6 Bias, Vop=9.1V, Vdd=3.3V.
4. Top: 0°C~+50°C, Tst: -20°C~+70°C.
5. Connector: COG+FFPC.
6. Drive IC: UC1705
7. Backlight: 2PCS WHITE LEDs, If=30mA & Vf=3.1±0.10V
8. With " * " Mark Dimensions Are Important Dimensions.

REV	REVISION RECORD	DATE	深圳市三元晶科技有限公司 ShenZhen TCCLCD HI- Tech Co., Ltd.				
A	FIRST ISSUE	2015/11/03	MODEL NO. 模组型号	SYG12832008-3C50F3LN2-BWC	GENERAL TOL: 未注公差	± 0.3	
B							
C			APPROVED BY 审核	CHECKED BY 检查	DRAWING BY 绘图	PAGE: 页码	UNIT: 单位/mm
D			Liu 2015/11/03	Francis 2015/11/03	Luoxian 2015/11/03	PROJECTION 三角法	