
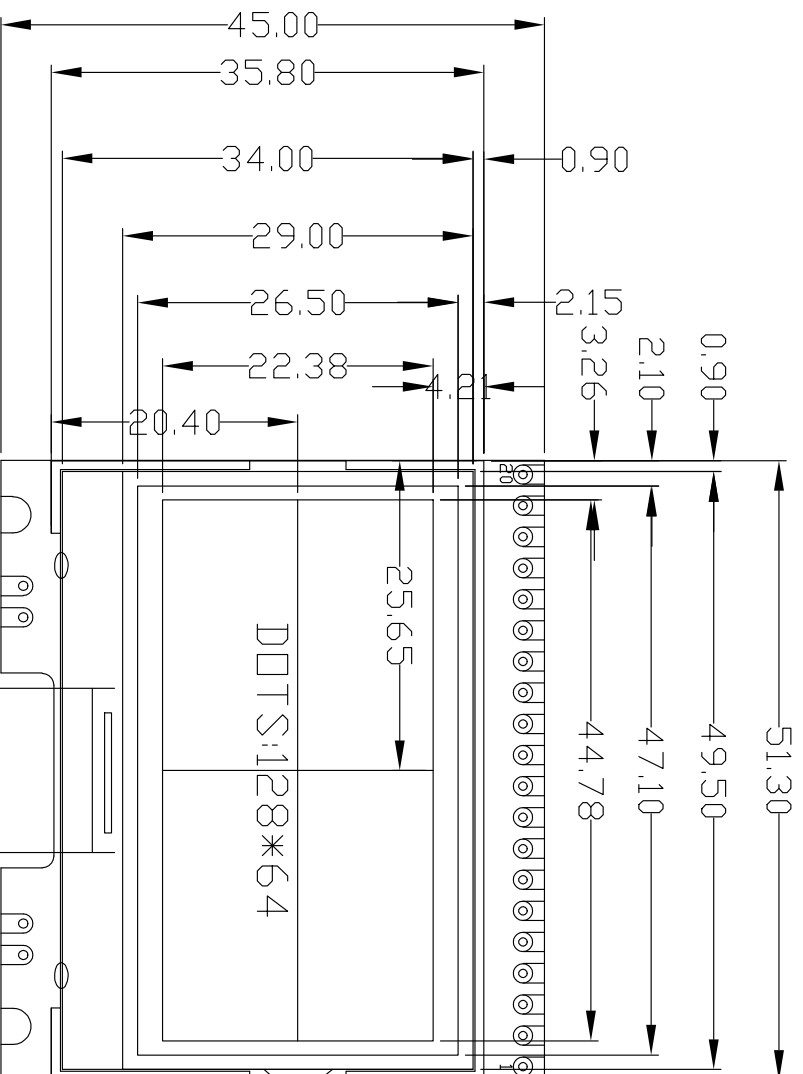


Customer approval :

1	ROM_IN
2	ROM_OUT
3	ROM_SCK
4	ROM_CS
5	BLK
6	VSS
7	VDD
8	A0
9	RST
10	CS
11	SDA
12	SCL
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC

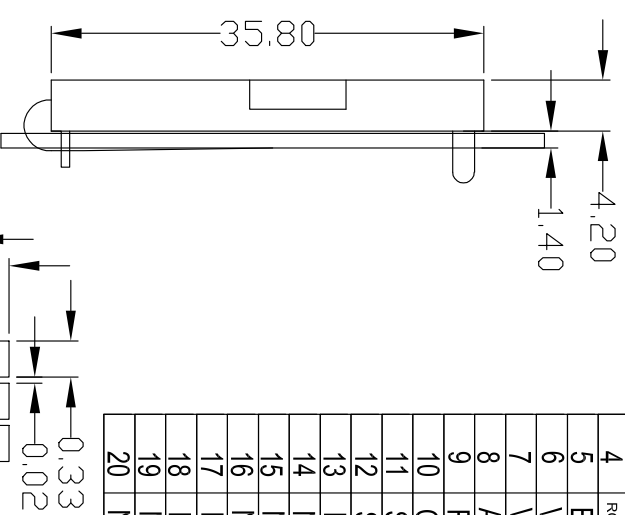

Specification:

- 1). Driving: Duty: $\frac{1}{64}$, Bias: $\frac{1}{9}$.LCD:9V;LCM:3.3V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: FSTN/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: ST7565R
- 6). Backlight: Whitet

REV	REVISION RECORD	DATE	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.	
A0	First issue	7-30/14	MODEL NO.	SYG12864SV10
			APPROVED BY	CHECKED BY
				DRAWING BY
			GENERAL TOL: ±0.3	
			Jequil	PROJECTION
				UNIT: mm