


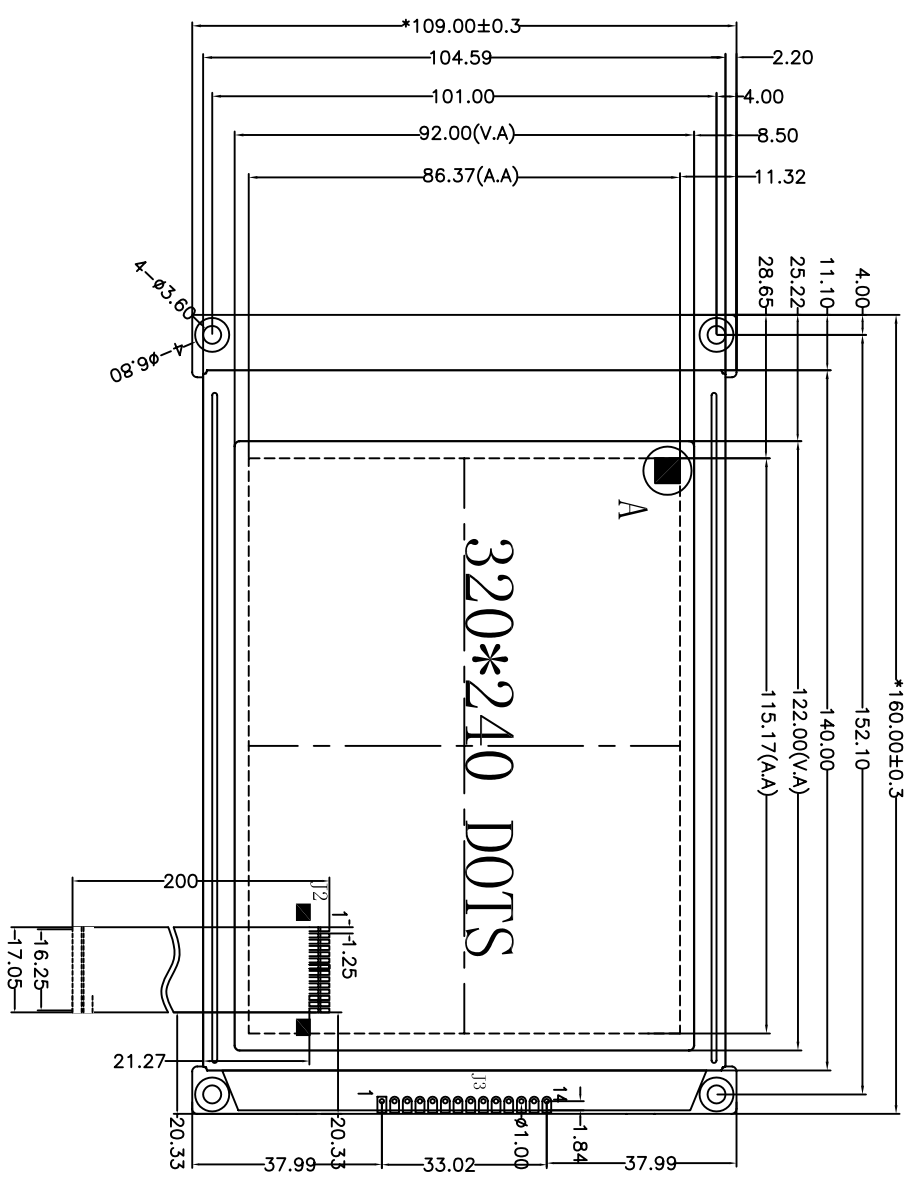


Customer approval :

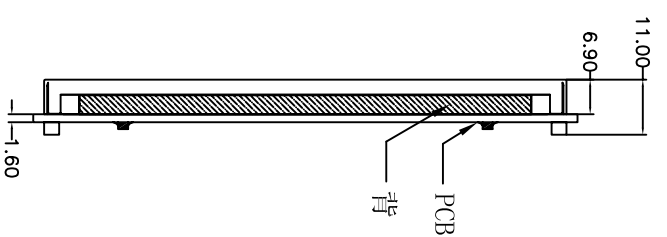

A:



- SPECIFICATION:
- 1). Driving: Duty:1/240, Bias:1/17, VOUT:-21.5V, V0:-18.5V, VDD:5V
 - 2). VIEWING DIRECTION: 6 O'CLOCK
 - 3). Display mode: STN/Negative/Transmissive/Blue
 - 4). Operating temp.: -20° C~+70° C
 - 5). Storage temp.: -30° C~+80° C
 - 6). Control IC: **no**
 - 7). BACKLIGHT Type: White 5V 160ma
 - 8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "(" ARE REFERENCED
 - 8). All the raw materials are RoHS compliant

J2		J3	
PIN	CONNECTION	PIN	CONNECTION
1	D0	1	D0
2	D1	2	D1
3	D2	3	D2
4	D3	4	D3
5	DISP	5	DISP
6	FLM	6	FLM
7	M	7	M
8	LP	8	LP
9	CP	9	CP
10	VCC	10	VCC
11	GND	11	GND
12	VOUT	12	VOUT
13	V0	13	V0
14	BLAof GND	14	BLAof GND

接口选择使用, FPC选择使用

REV	REVISION RECORD	DATE	MODEL NO.		CHECKED BY		DRAWING BY		PAGE: 1 OF 1	UNIT: mm
A0	First issue	03/15	模	组	SYM320240B8V20-5B1LN3-B5WI	APPROVED BY	LAN	PROJECTION		
			Shenzhen TCC LCD Hi-Tech Co., Ltd.						GENERAL TOL: ±0.3	



深圳市三元晶科技有限公司
Shenzhen TCC LCD Hi-Tech Co., Ltd.