
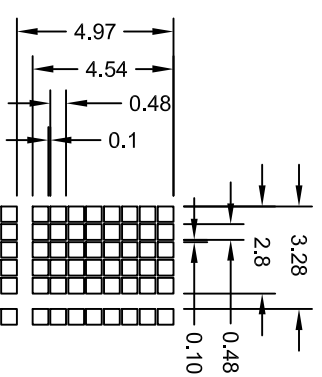

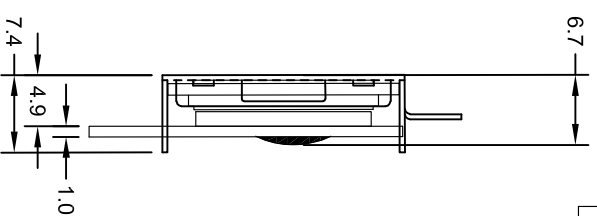


Customer approval :

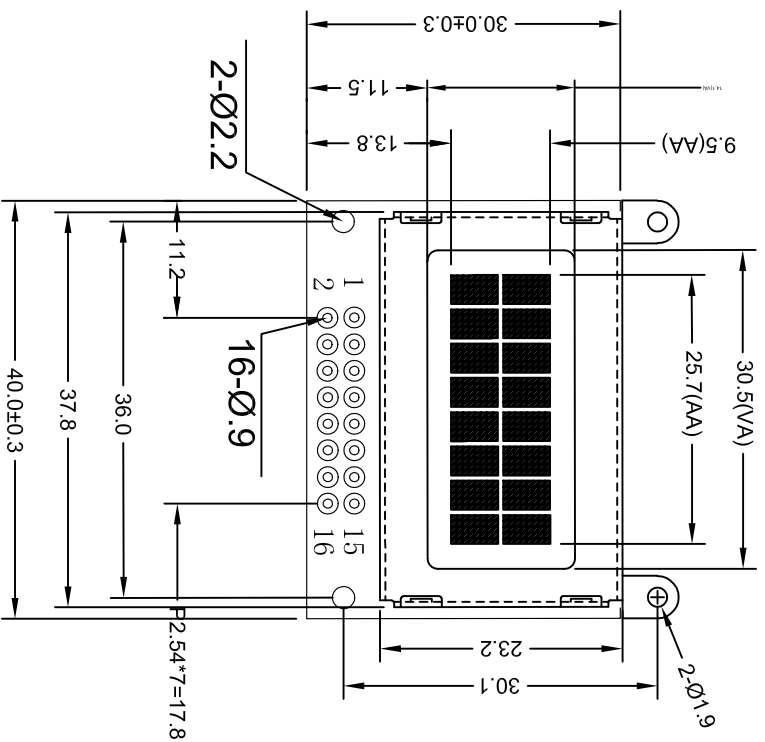

**SPECIFICATION:**

- 1). Driving: Duty:1/16, Bias: 1/5, V<sub>icm</sub>=5.0V, V<sub>led</sub>:5.0V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode:STN/Positive/Transflective/YG
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Control IC: SPL C780D1(Or Compatible)
- 7). BACKLIGHT: White Array LED: 5.0V
- 8). DIMENSIONS WITH MARK "()" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REV	REVISION RECORD	DATE	MODEL NO.	SYB0022BV10-5C10V1	GENERAL TOL:
A	FIRST ISSUE	2011/03/09	模组型号		±0.3
B			APPROVED BY 审核	检查	
C			Liu	Francis	
D			2011/03/09	2011/03/09	
			深圳市三元晶科技有限公司 ShenZhen TCCLCD HI-Tech Co., Ltd.		
			DRAWING BY 绘图	Luokan	PAGE: OF 1 页码
					UNIT: mm 单位
					PROJECTION 三角法