

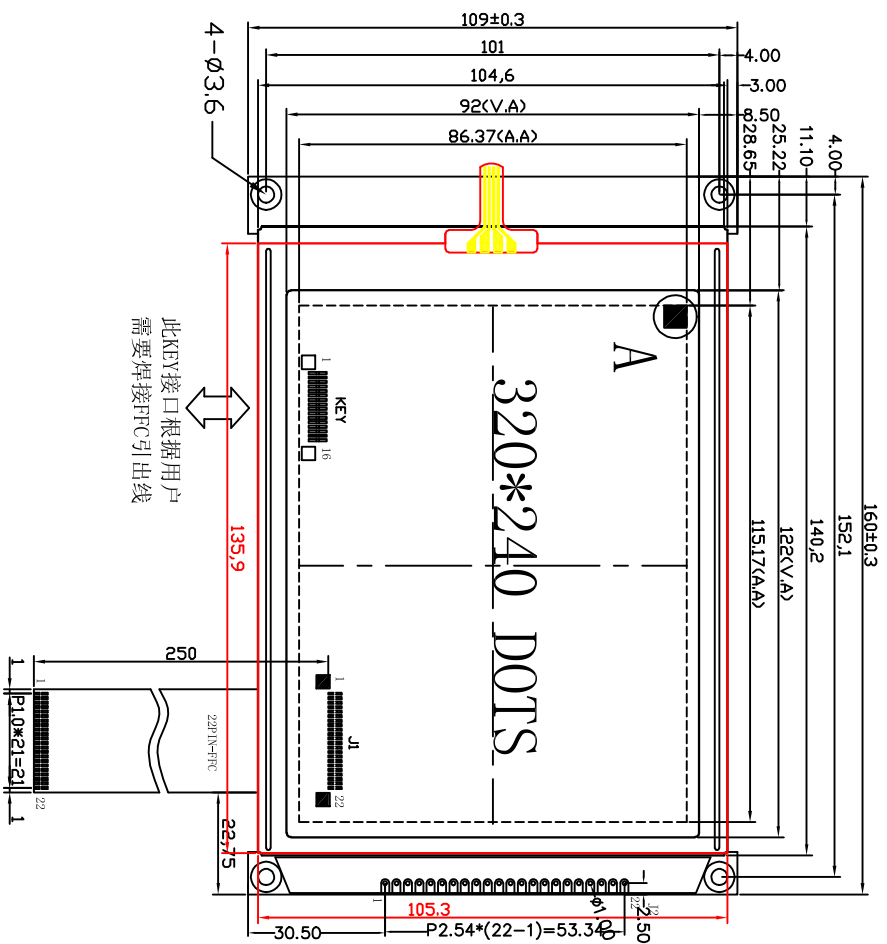


Customer approval :



J2接口在背光底面, 建议客户不使用此接口, 若客户要使用此接口, 请从模块背面焊接排线使用!



J1/J2:

接口选择使用, FPC选择使用, TP选择使用

| PIN | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|------------|-----|-----|-----|-----|------|-----|-----|------|-----|-----|-----|-----|
| CONNECTION | VSS | VDD | V0 | /MR | /RD | /CS | C/D | /RST | DB0 | DB1 | DB2 | DB3 |
| PIN | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | | |
| CONNECTION | DB4 | DB5 | DB6 | DB7 | YOUT | BLA | INT | BUSY | BLA | BLK | | |

- SPECIFICATION:
- 1). Driving Duty:1/240, Bias:1/17, VOUT:-21.5V, V0:-18.5V, VDD:5V
 - 2). VIEWING DIRECTION: 6 O'CLDCK
 - 3). Display mode: FSTN/Negative/Transmissive
 - 3). Operating temp.i: -20°C~+70°C
 - 4). Storage temp.i: -30°C~+80°C
 - 5). Control IC: RA8806
 - 6). BACKLIGHT Type: Edge,White
 - 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
 - 8). All the raw materials are RoHS compliant

| REV | REVISION RECORD | DATE | MODEL NO. 模组型号 | | | | GENERAL TOL: ± 0.3 公差 | | | | |
|-----|-----------------|------------|-----------------------------------|--|--|--|--------------------------|---------------------|--|--|--|
| A0 | First issue | 11/8 | SYM320240BZK V33-5C6K1UNT R8-B5W1 | | | | PAGE: 10F1 UNIT: mm | | | | |
| | APPROVED BY | CHECKED BY | DRAWING BY | 深圳市三元晶科技有限公司 ShenZhen TCC LCD Hi-Tech Co., Ltd. | | | | PROJECTION 三 角 法 | | | |