


Customer approval :

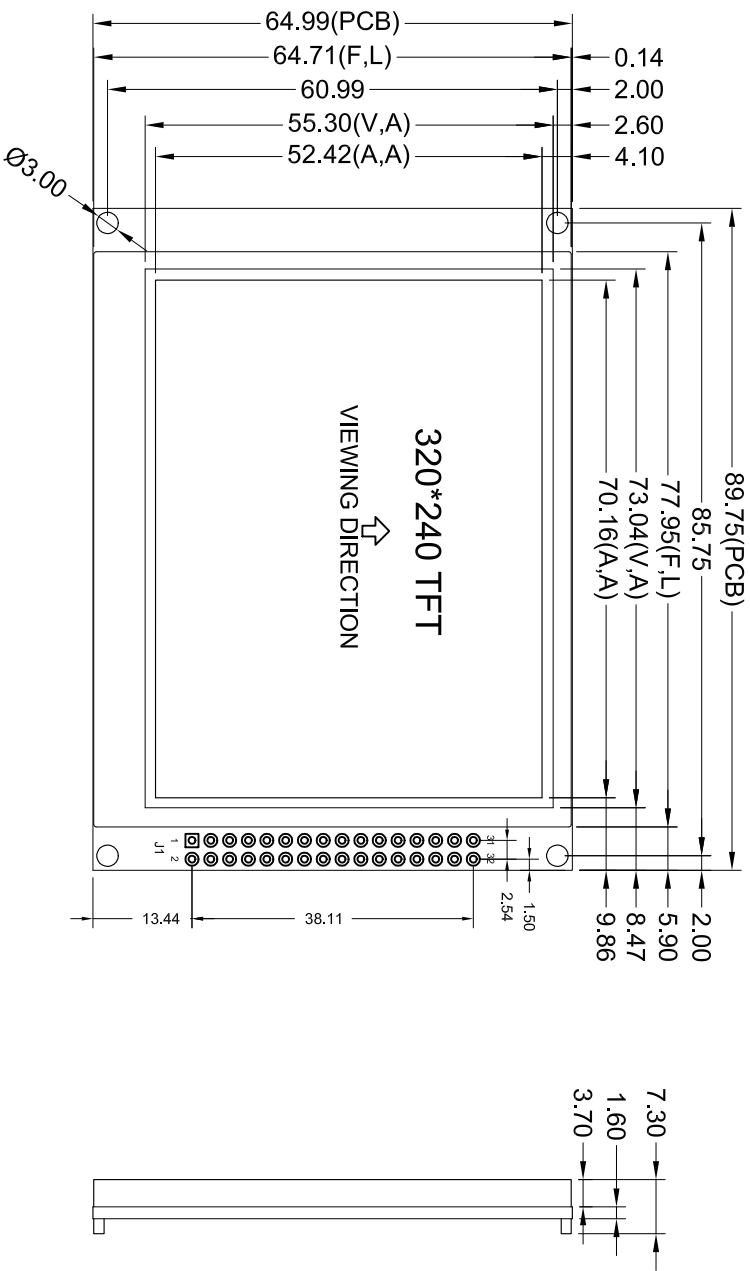

PIN	J1
1	VSS
2	VDD
3	NC
4	/MR
5	/RD
6	/CS
7	RS
8	/RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	DB8
18	DB9
19	DB10
20	DB11
21	DB12
22	DB13
23	DB14
24	DB15
25	BLA
26	BLK
27	TP_JMSO
28	TP_MIT
29	TPMOSI
30	TP_BUST
31	TP_SCK
32	TP_CS

Specification:

- 1). Driving:VDD:5.0V
- 2). Viewing direction: 12 o'clock
- 3). Display mode: TFT 320\*240 65K Colour
- 3). Operating temp.: -20°C~+70°C
- 4). Storage temp.: -30°C~+80°C
- 5). Control IC: SSD1963
- 6). Backlight :VBL:5.0V
- 7). All the raw materials are RoHS compliant
- 8). Interface:8Bit 16Bit 8080/6800;SPI;I2C;RS232

REV	REVISION RECORD	DATE	MODEL NO.	SYC320240A035V21	GENERAL TOL:
A	FIRST ISSUE	2016/04/22	模组型号		± 0.3
B			APPROVED BY 审核	Francis	
C			Liu	Luoxian	
D			2016/04/22	2016/04/22	



深圳市三元晶科技术有限公司  
ShenZhen TCC LCD HI-Tech Co., Ltd.

