


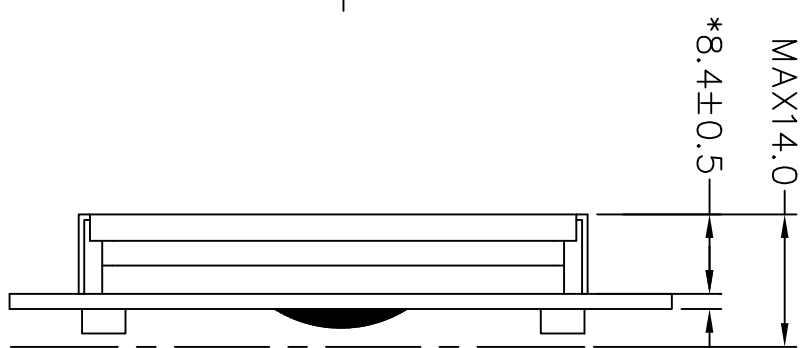


Customer approval :

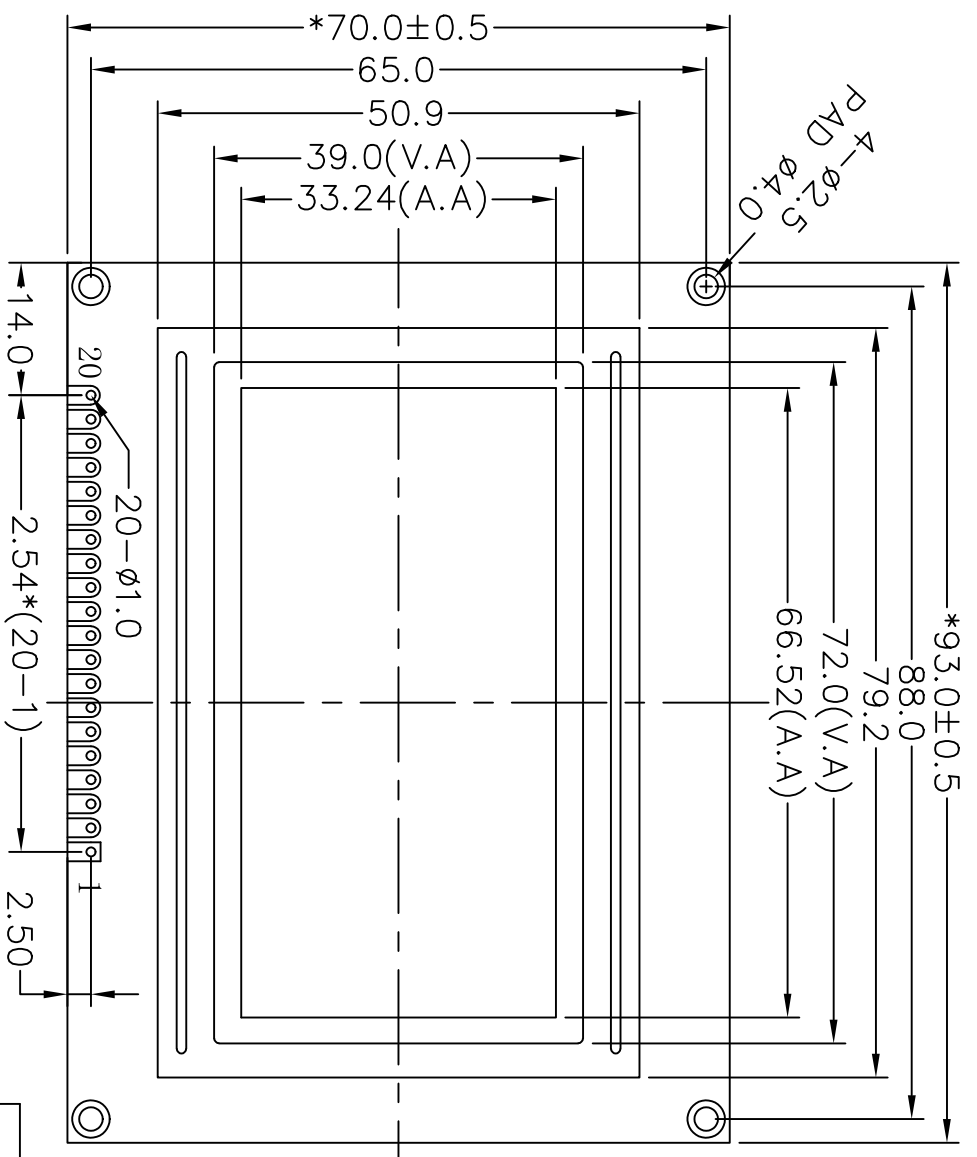

DOT SIZE
SCALE 10:1

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	VSS	VDD	V0	C/D	R/W	E	DB0	DB1	DB2	DB3
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB4	DB5	DB6	DB7	CS1	CS2	/RST	VOUT	BLA	BLK

Specification:

- 1). Driving: Duty:1/64, Bias:1/9, Vout:-4.9V, Vo:-4.2V, Vdd:5.0V
- 2). Viewing angle: 6 0'clock
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20° C~+70° C
Storage temp.: -30° C~+80° C
- 5). IC: AIP31107 and AIP31108
- 6). Backlight: Edge, White (BLA-BLK=5.0V)
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are ROHS compliant

REV	REVISION RECORD	DATE
A0	First issue	11/12



深圳市三元晶科技有限公司
Shenzhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO.	SYB12864C5V20-5C9BLN7R	GENERAL TOL: XX ±0.3 XXX ±0.1
APPROVED BY	CHECKED BY	PAGE?
DRAWING BY	Jequil	PROJECTION
20100324		UNIT: mm

