


Customer approval :

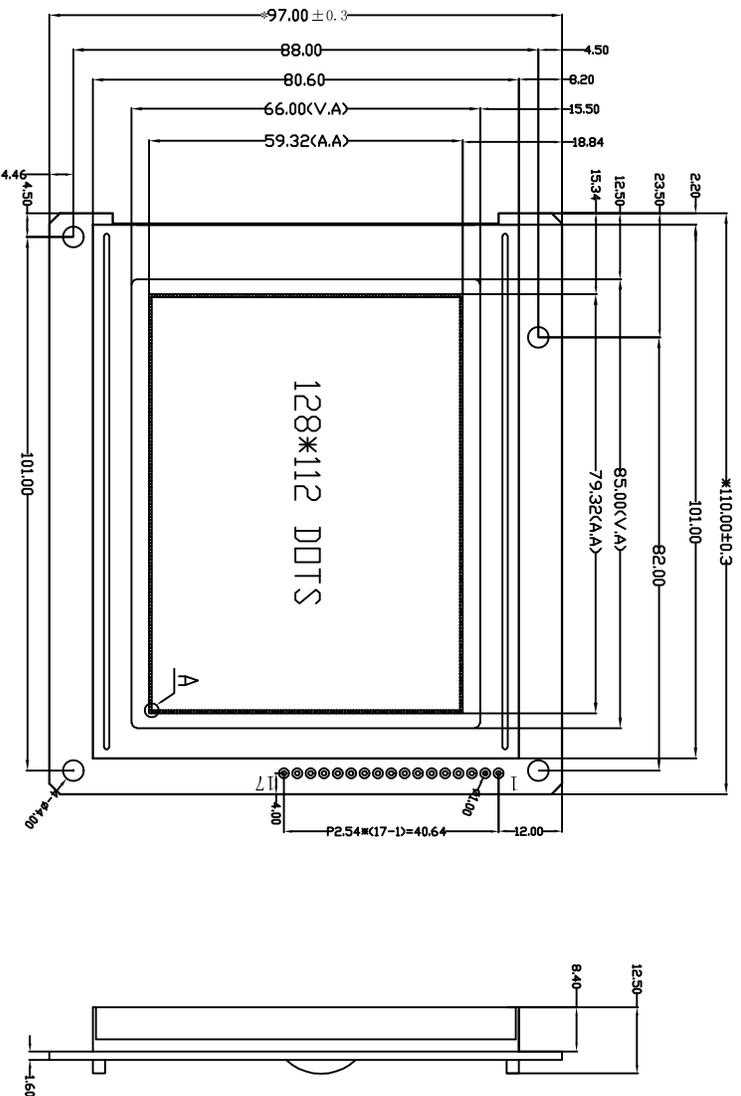

Specification:

- 1). Driving: Dost:128\*112, Duty:1/128, Bias:1/12, VDD: 5V, VEE: -15.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Y-G/TRANSMISSIVE
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). Controller IC: NO Control
- 6). Backlight: Bottom White
- 7). Dimensions with mark "\*" are important,  
with mark "(") are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
CONNECTION	BLA	VEE	VDD	GND	GND	BL-ON	YD	M	CL1	CL2	D0	D1	D2	D3	NC	NC	NC

REVISION RECORD

First issue

AO



深圳市三元晶科技有限公司  
ShenZhen TCC LCD Hi-Tech Co., Ltd.

DRAWING NO. DMF50369

GENERAL TOL: ± 0.3

APPROVED BY

UNIT: mm

BY

PAGE

2010/03/12



1/1