

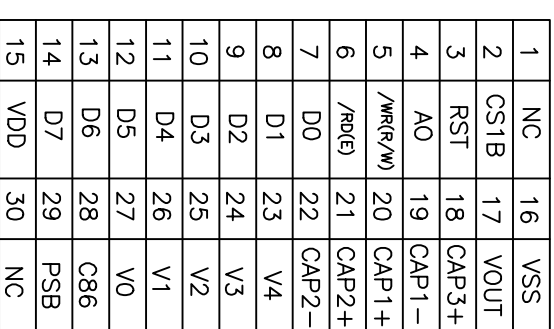


Customer approval :

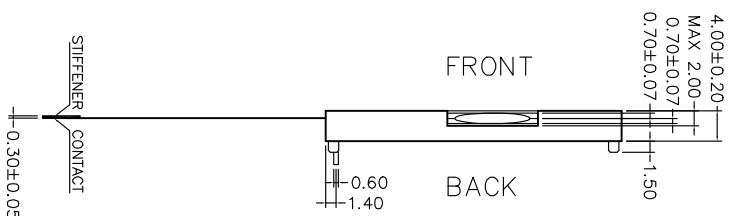

1. Driving: Duty:1/64, Bias:1/9, VOP:8.6V, VDD:3.0V.
2. Viewing direction: 6 o'clock
3. Display mode: FSTN/Transflective/Positive.
4. Operating temp:-20°C~+70°C
5. Storage temp: -30°C~+80°C
6. Control IC:ST7565R
7. Backlight: Edge White LEDX2: VF:3.0V IF: 30mA
8. dimensions with mark "H" are important
with mark "V" are referenced
- 9). All the raw materials are RoHS compliant



REV	REVISION RECORD	DATE	 深圳市三元晶科技有限公司 Shenzhen TCCLCD Hi-Tech Co., Ltd.				
A	FIRST ISSUE	2015/11/03	MODEL NO.	SYG128640254-3C33F3L1N2-B4WC	GENERAL TOL:	± 0.25	
B			模组型号				
C			APPROVED BY 审核	CHECKED BY 检查	DRAWING BY 绘图	PAGE: 1 OF 1 页面	UNIT: 单位:mm
D		2015/11/03	Liu	Francis 2015/11/03	Luoxian 2015/11/03	PROJECTION 三角法	