


Customer approval :

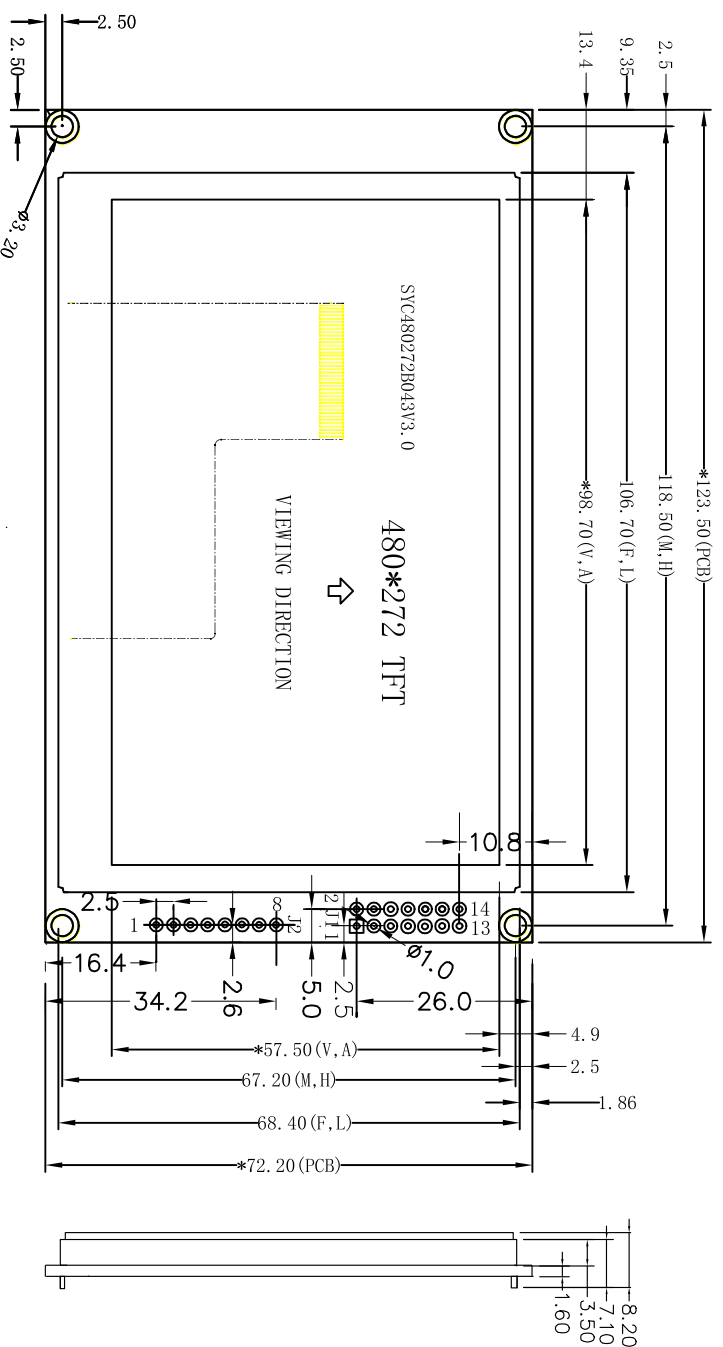

J2(FLASH)	
NO.	SYMBOL
1	CS0
2	CS1
3	SO
4	SI
5	SCLK
6	VDD
7	GND
8	MCURST

J1	
NO.	SYMBOL
1	SCS#
2	SCLK
3	MCU MOSI
4	MCU MISO
5	GND
6	GND
7	RESET
8	INT
9	MCU IO
10	T-CLK
11	T-CS
12	T-DIN
13	T-DOU1
14	T-IRQ

Specification:

- 1). Driving:VDD:3.3V
- 2). Viewing direction: 6 o'clock
- 3). Display mode: TFT 480*272 56K Colour
- 3). Operating temp.:0°C ~ +50°C
- 4). Storage temp.: -10°C ~ +60°C
- 5). Control IC:
- 6). BACKLIGHT :VBL:5.0V IBL:200mA 500cd/m²
- 7). All the raw materials are RoHS compliant
- 8). Interface:SPI

REV	REVISION RECORD	DATE	深圳市三元晶科技有限公司 ShenZhen TCCLCD Hi- Tech Co., Ltd.					
A	First Issue	5/23						
B			MODEL NO.	SYCA80272B043V30-3CG4ALN2R-B2NC		GENERAL TOL.: ± 0.3		
C			APPROVED BY	CHECKED BY	DRAWING BY	PAGE: 1 OF 1	UNIT: mm	
D			Liu 2018/05/23	Liaoxuexian 2018/05/23	Luoxian 2018/05/23	PROJECTION		