



8	7	6	3	2	1
			REV:	DESCRIPTION	BY
					DATE

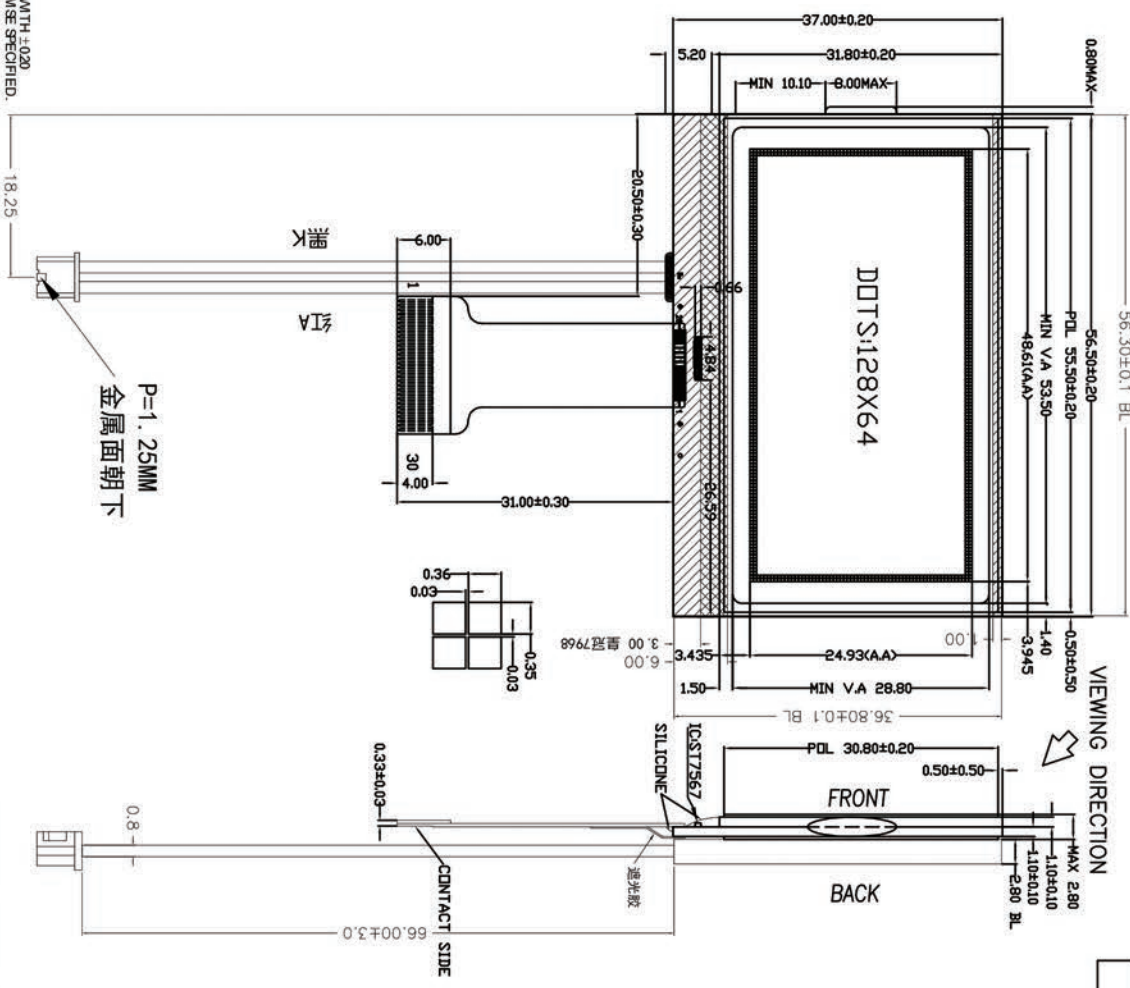

- NOTES
- ALL DIMENSIONS ARE IN (MM) WITH ±0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
1. DISPLAY TYPE: FSTN/POSITIVE
  2. LCD OPERATING VOLTAGE: 90V/VDD=3.0V
  3. OPERATING TEMPERATURE: -20° C~70° C
  4. STORAGE TEMPERATURE: -30° C~80° C
  5. DRIVE MODE: 1/6DUTY/1/8BIAS
  6. VIEWING DIRECTION: 1200
  7. POLARIZER TYPE: TRANSPARENT
  8. CONNECTOR: COG+(FROST7587)
  9. Backlight: WHITE
  10. RoHS requirement

PIN	接口定义
1	NC
2	PSB
3	CB6
4	NC
5	NC
6	NC
7	NC
8	NC
9	V/G
10	NC
11	NC
12	XVD
13	V/D
14	NC
15	NC
16	VSS
17	V/DD
18	D7
19	D6
20	D5
21	D4
22	D3
23	D2
24	D1
25	D0
26	/RD
27	/WR
28	AD
29	RST
30	CS



TCC LCD Hi-Tech Co., Ltd.

SHEET: 1 of 3		LCD NUMBER :	
APPROVALS		SYG12864017	
DWN	LH Liu	SCALE:	UNITS:
CHK		GENERAL TOL:± 0.2	MM
APP		DO NOT SCALE THIS DRAWING.	

8 7 6 5 4 3 2 1